



TMKFE



USE:


TMKFE, broaching in plastics of max. hardness HRB 60

Order Examples:

TMKFE-M3-8, internal thread M3, L length 8mm, zinc-plated steel

IMPORTANT NOTES

- All stated dimensions are in mm
- Data modification reserved without prior notice

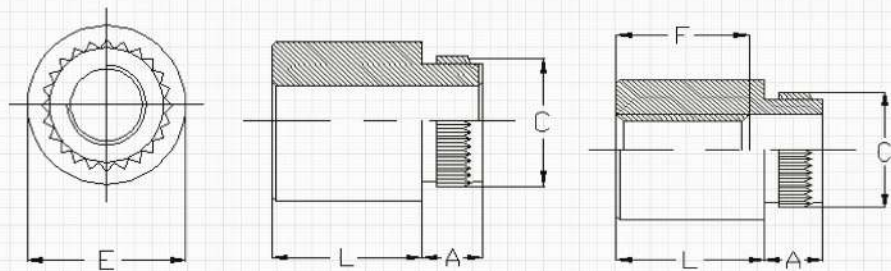

Thread spec.	Thru hole +0.1-0.08	Length L +0.05/-0.13								Hole size in plastic +0.08	Min. thickness of plastic	A	Dia-meter C +/- 0.08	Dia-meter E +/- 0.13	Min. dist. hole to edge
		3	4	6	8	10	12	14	16						
M3x0.5		3	4	6	8	10	12	14	16	4.2	1.53	1.53	4.68	5.56	4.4
	3.6	3	4	6	8	10	12	14	16	5.4	1.53	1.53	5.87	7.14	5.5
	4.2	3	4	6	8	10	12	14	16	6.4	1.53	1.53	6.86	8.74	7.1
Min thread length F		Entire thread				9.5 +/- 0.4									