



TMBSO
TMBSOS



USE:

TMBSO, pressing into steel sheet of max. hardness HRB 80

TMBSOS, pressing into steel sheet of max. hardness HRB 70



Order Examples:

TMBSO-M4-8, internal thread M4, total length 8mm, zinc-plated steel

TMBSOS-M5-12, thread M5, total length 12mm, stainless steel A2 serie 300

IMPORTANT NOTES

- All stated dimensions are in mm
- Data modification reserved without prior notice
- A special type TMBSO4 is designed for stainless steel sheet HRB 90

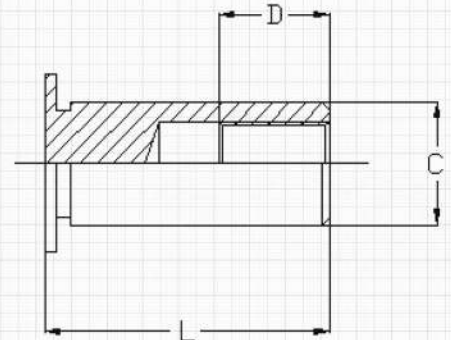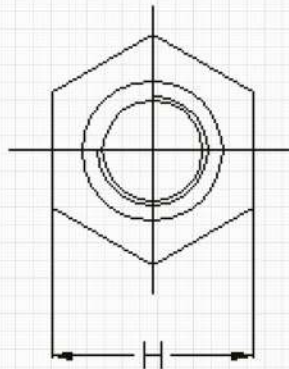

Thread size x pitch	Length L+0.05/-0.13										Min steel sheet thickness	Hole size in steel sheet +0.08	Dia- meter C -0.13	Dia- meter H	Min. dist. hole to edge	
	6	8	10	12	14	16	18	-	-	-						
M3x0.5	6	8	10	12	14	16	18	-	-	-	1	4.2	4.2	4.8	6	
3.5M3x0.5	6	8	10	12	14	16	18	-	-	-	1	5.4	5.4	6.4	6.8	
M3.5x0.6	6	8	10	12	14	16	18	20	22	25	1	5.4	5.4	6.4	6.8	
M4x0.7	6	8	10	12	14	16	18	20	22	25	1.3	7.2	7.2	7.9	8	
M5x0.8	6	8	10	12	14	16	18	20	22	25	1.3	7.2	7.2	7.9	8	
Bore length D +/-0.25	3.2	4	5	6.5	9.5											